


EJ-BSVLG-MEDIUM-ISO

- Ideal for decentralized applications
- Excellent ratio between suction flow rate and compressed air consumption
- Available with ON/OFF vacuum valve, blow-off, and integrated manual override control
- POM manifold prepared for mounting ISO 15218 (15 mm) valve of type 3/2, NO or NC, with 1.6 mm diameter opening
- Available with two- and three-stage EJ-MEDIUM cartridges (EJ-LP, EJ-HF, EJ-HV)
- Additional vacuum port for mounting a vacuum switch


Typical applications

- Packaging machines, for the food and pharmaceutical sector
- Handling of cosmetic products
- Pick-up of porous items (cardboard, wooden sheets)
- In applications that require an integrated control system with reduced weight and compact dimensions (electronics sector)

NEW

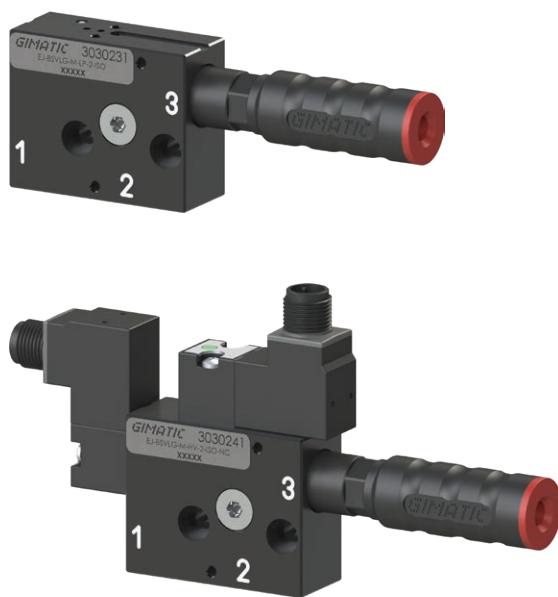

Application example

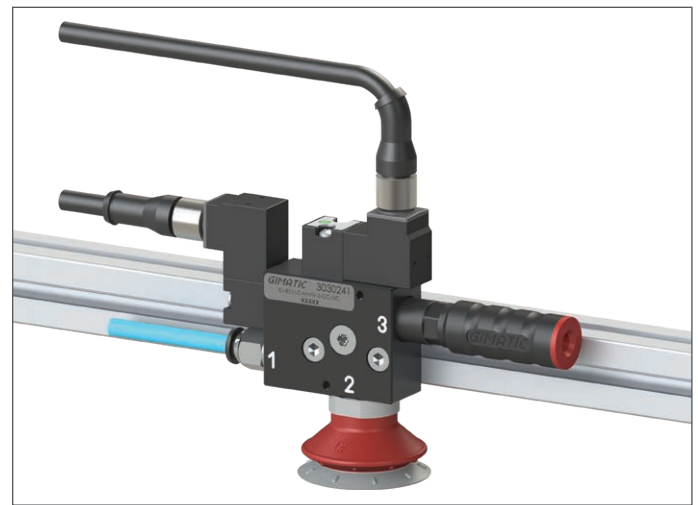

Pump technical features

Medium	Compressed air in compliance with ISO 8573-1:2010 [7:4:4]
Max feed pressure	0.7 MPa
Weight (with solenoid valves)	60 (130) g
Material	SS, POM, Al, Nitrile (POM)
Noise level	< 70 dB
Operating temperature	-5 ÷ +50 °C

Technical features of the solenoid valves (optional)

Brand	FIM Valvole		
Model	N331/3LB		
Operation	3/2 Normally closed (NC)	A	
Orifice	0.06"		
Type of electrical connection	5-pin M12x1 (each valve)		
Drive voltage	24 Vcc ±10%		
Power absorption	2.5 W (each valve)		
IP rating	IP65		
Standard	ISO 15218 (0.59")		


Features of compatible valves

Standard	ISO 15218 - 0.59" (Ø0.06" hole)		
Operation	3/2 NC	C	3/2 NO
			C


Example of compatible valves

Brand	Coding	Lay-out
FIM	N331/3LB	A
FIM	N331/ROB	A
FIM	N341/3B (5 bar max)	B
Camozzi	W000-303-W23	A
Camozzi	W000-403-W23 (5 bar max)	B


A



B



C


Suction flow rate

Model	Feed pressure [MPa]	Air consumption [NI/s]	Suction flow rate [NI/s] at different vacuum levels [kPa]										Max vacuum [kPa]
			0	-10	-20	-30	-40	-50	-60	-70	-80	-90	
EJ-BSVLG-M-LP-2	0.45 *	0.55	0.67	0.61	0.53	0.38	0.23	0.12	0.09	0.06	0.02	—	-89
EJ-BSVLG-M-LP-3	0.45 *	0.55	1.5	0.71	0.53	0.38	0.23	0.12	0.09	0.06	0.02	—	-89
EJ-BSVLG-M-HF-2	0.65 *	0.43	0.78	0.68	0.52	0.31	0.21	0.15	0.10	0.08	—	—	-73
EJ-BSVLG-M-HF-3	0.65 *	0.43	1.35	0.75	0.55	0.31	0.21	0.15	0.10	0.08	—	—	-73
EJ-BSVLG-M-HV-2	0.55 *	0.47	0.76	0.63	0.54	0.32	0.17	0.15	0.11	0.07	0.05	0.01	-94
EJ-BSVLG-M-HV-3	0.55 *	0.47	1.47	0.78	0.54	0.32	0.17	0.15	0.11	0.07	0.05	0.01	-94

For technical specifications, regarding the suction flow rate and the air consumption at different pressures, please refer to the technical data sheets of the EJ-MEDIUM cartridges in the two- and three-stage versions

Evacuation time

Model	Feed pressure [MPa]	Air consumption [NI/s]	Evacuation time [s/I] to reach different vacuum levels [kPa]									Max vacuum [kPa]
			-10	-20	-30	-40	-50	-60	-70	-80	-90	
EJ-BSVLG-M-LP-2	0.45 *	0.55	0.17	0.33	0.55	0.9	1.5	2.4	3.7	7.1	—	-89
EJ-BSVLG-M-LP-3	0.45 *	0.55	0.08	0.23	0.44	0.76	1.4	2.4	3.7	7.1	—	-89
EJ-BSVLG-M-HF-2	0.65 *	0.43	0.13	0.30	0.54	0.9	1.5	2.3	3.2	—	—	-73
EJ-BSVLG-M-HF-3	0.65 *	0.43	0.10	0.25	0.48	0.8	1.3	2.3	3.2	—	—	-73
EJ-BSVLG-M-HV-2	0.55 *	0.47	0.14	0.32	0.55	1.0	1.6	2.4	3.5	5.1	8.7	-94
EJ-BSVLG-M-HV-3	0.55 *	0.47	0.08	0.24	0.47	0.88	1.6	2.4	3.5	5.1	8.7	-94

For technical specifications regarding the evacuation time and the consumption at different pressures, please refer to the technical data sheets of the EJ-MEDIUM cartridges, in the two- and three-stage versions

*

The recommended feed pressure is increased by 0.05 Mpa due to the presence of the solenoid valve. This technical solution allows the performance levels stated in the technical data sheets to be reached and does not lead to any increase in the pump's air consumption.

Introduction

Vacuum theory

Suction cups

Vacuum pumps

Vacuum gripping systems

Customised solutions

Suspensions


System accessories

Identification codes

Alphanumeric code	Description	Order code
EJ-BSVLG-M-LP-2-ISO	EJ-BSVLG-MEDIUM-LP-2-ISO vacuum pump with holder and integrated silencer, ready for ISO 15218 valve, G1/4" vacuum port	3030231
EJ-BSVLG-M-LP-3-ISO	EJ-BSVLG-MEDIUM-LP-3-ISO vacuum pump with holder and integrated silencer, ready for ISO 15218 valve, G1/4" vacuum port	3030232
EJ-BSVLG-M-HF-2-ISO	EJ-BSVLG-MEDIUM-HF-2-ISO vacuum pump with holder and integrated silencer, ready for ISO 15218 valve, G1/4" vacuum port	3030233
EJ-BSVLG-M-HF-3-ISO	EJ-BSVLG-MEDIUM-HF-3-ISO vacuum pump with holder and integrated silencer, ready for ISO 15218 valve, G1/4" vacuum port	3030234
EJ-BSVLG-M-HV-2-ISO	EJ-BSVLG-MEDIUM-HV-2-ISO vacuum pump with holder and integrated silencer, ready for ISO 15218 valve, G1/4" vacuum port	3030235
EJ-BSVLG-M-HV-3-ISO	EJ-BSVLG-MEDIUM-HV-3-ISO vacuum pump with holder and integrated silencer, ready for ISO 15218 valve, G1/4" vacuum port	3030236
EJ-BSVLG-M-LP-2-ISO-NC	EJ-BSVLG-MEDIUM-LP-2-ISO vacuum pump with holder and integrated silencer, NC 3/2 x2 solenoid valve for vacuum and blow-off, 24Vdc, 2.5W, M12 5-pin, IP54, G1/4" vacuum port	3030237
EJ-BSVLG-M-LP-3-ISO-NC	EJ-BSVLG-MEDIUM-LP-3-ISO vacuum pump with holder and integrated silencer, NC 3/2 x2 solenoid valve for vacuum and blow-off, 24Vdc, 2.5W, M12 5-pin, IP54, G1/4" vacuum port	3030238
EJ-BSVLG-M-HF-2-ISO-NC	EJ-BSVLG-MEDIUM-HF-2-ISO vacuum pump with holder and integrated silencer, NC 3/2 x2 solenoid valve for vacuum and blow-off, 24Vdc, 2.5W, M12 5-pin, IP54, G1/4" vacuum port	3030239
EJ-BSVLG-M-HF-3-ISO-NC	EJ-BSVLG-MEDIUM-HF-3-ISO vacuum pump with holder and integrated silencer, NC 3/2 x2 solenoid valve for vacuum and blow-off, 24Vdc, 2.5W, M12 5-pin, IP54, G1/4" vacuum port	3030240
EJ-BSVLG-M-HV-2-ISO-NC	EJ-BSVLG-MEDIUM-HV-2-ISO vacuum pump with holder and integrated silencer, NC 3/2 x2 solenoid valve for vacuum and blow-off, 24Vdc, 2.5W, M12 5-pin, IP54, G1/4" vacuum port	3030241
EJ-BSVLG-M-HV-3-ISO-NC	EJ-BSVLG-MEDIUM-HV-3-ISO vacuum pump with holder and integrated silencer, NC 3/2 x2 solenoid valve for vacuum and blow-off, 24Vdc, 2.5W, M12 5-pin, IP54, G1/4" vacuum port	3030242

Identification codes

Alphanumeric code	Accessories	Order code
CFGM1290525P	Angular female connector with M12 lock nut, 5 pins, round PUR cable, length 2.5 metres	CFGM1290525P
CFGM1200525P	Axial female connector with M12 lock nut, 5 pins, round PUR cable, length 2.5 metres	CFGM1200525P
EJ-SV-3/2NC	Spare part for solenoid valve 3/2 NC, 24V DC, 0-7 bar, 50 l/min, ISO 15218 M12	3030256

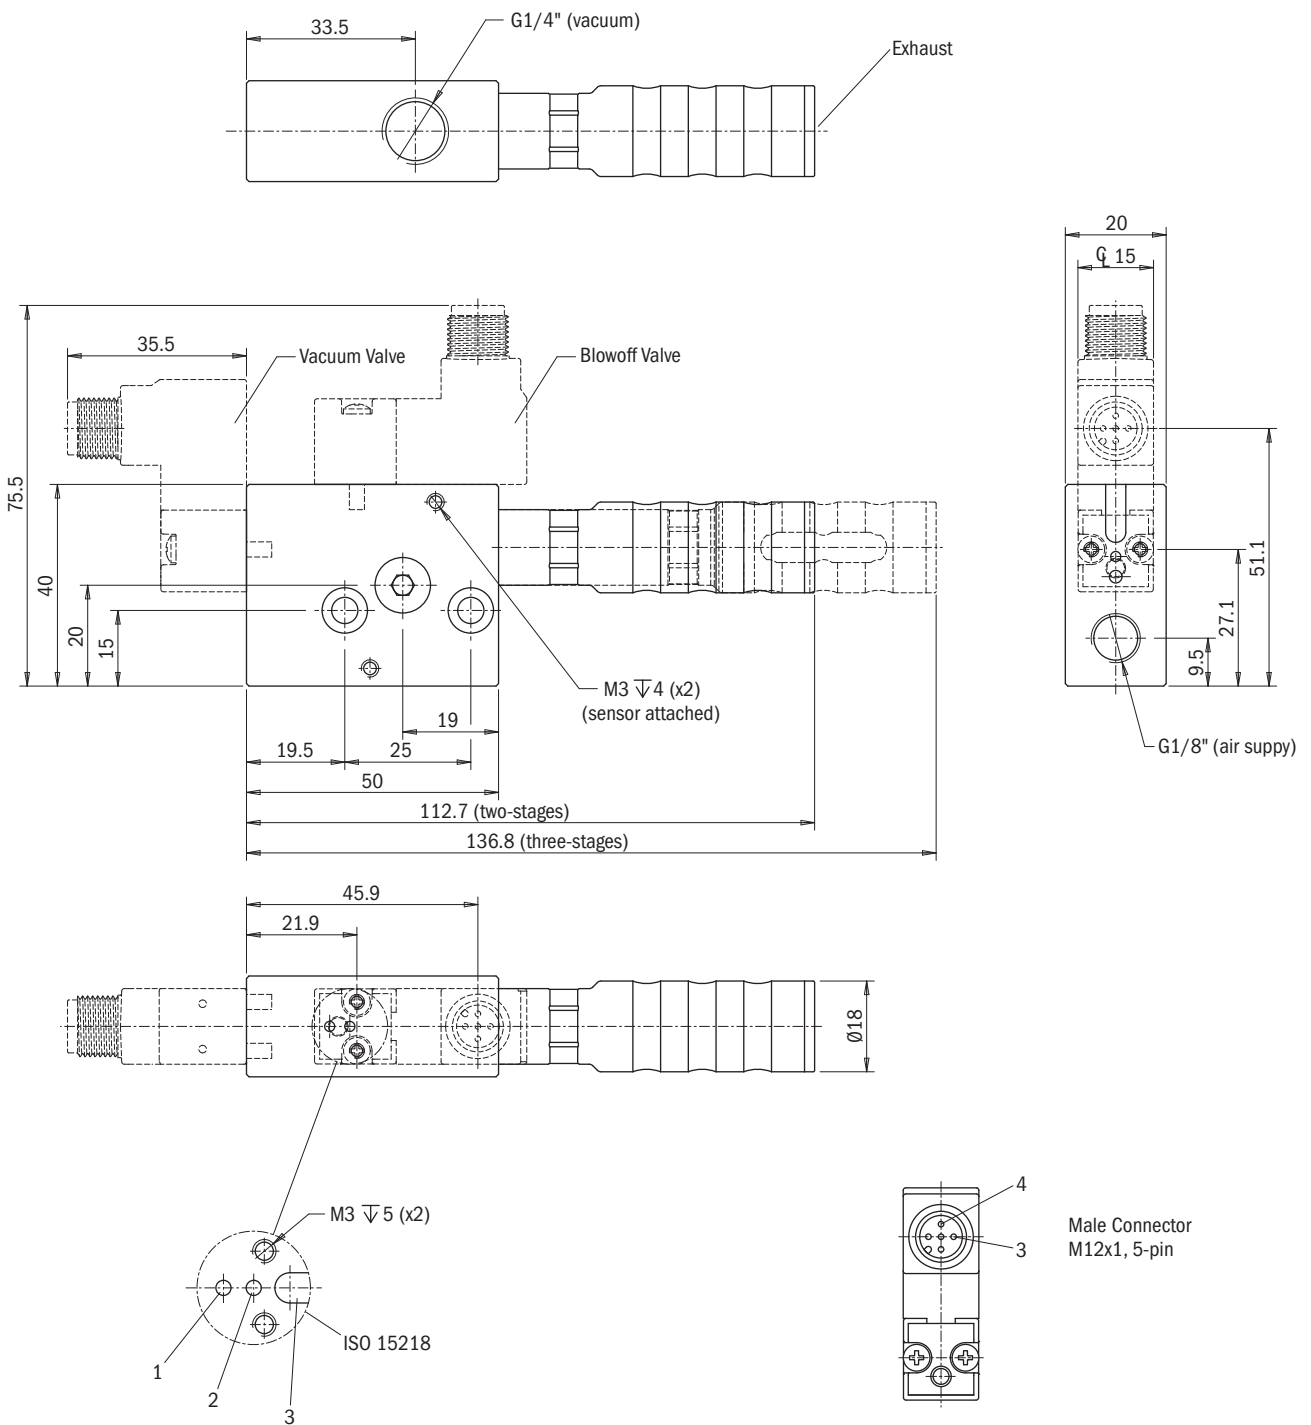

n°	Function
1	In
2	Out
3	Exhaust

Pin	Function		Color
3	GND	0	Blue
4	COMMAND	+24 V	Black