
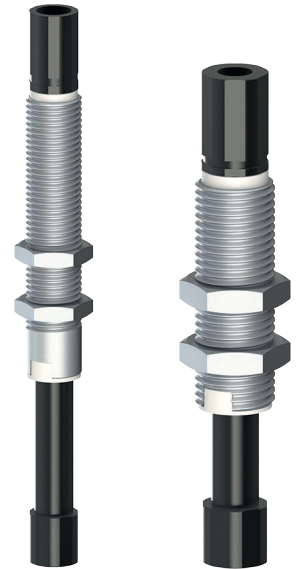
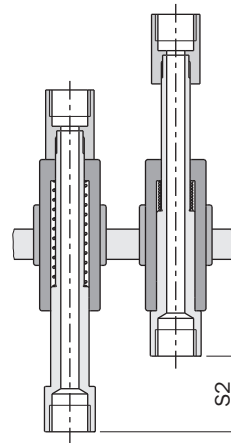


Sospensioni rotanti con corpo filettato

- Corpo e stelo in alluminio anodizzato.
- Stelo girevole.
- Pressione di utilizzo: -1 ÷ 8 bar.
- Molla in acciaio inossidabile.
- Grasso alimentare NSF-H1.

Threaded-body rotative suspensions

- Body and rod in anodized aluminum.
- Rotative rod.
- Pressure range: -1 ÷ 8 bar.
- Spring in stainless steel.
- NSF-H1 food-grade grease.

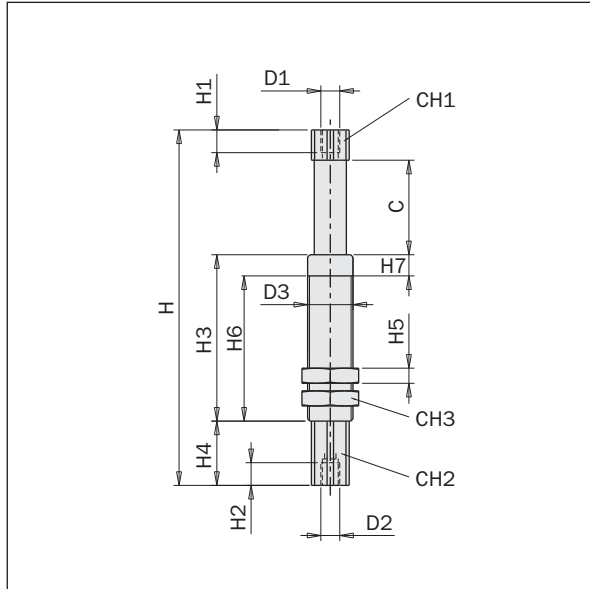

NEW NEW

	VSRT1010 9900001	VSRT1025 9900002	VSRT1210 9900049	VSRT1225 9900050	VSRT1420 9900003	VSRT1435 9900004	VSRT1420M1 9900085	VSRT1435M1 9900087	VSRT1620 9900005	VSRT1635 9900006	VSRT2025F18 9900007	VSRT2025F14 9900051	VSRT2050F18 9900008	VSRT2050F14 9900052	VSRT2540 9900047	VSRT2580 9900048
H [mm]	56	90.5	65	99	107	142	107	142	107	142	126	126	183.5	183.5	173	263
H1 [mm]	5	5	5.5	5.5	7	7	7	7	7	7	10	10	10	10	10.5	10.5
H2 [mm]	5	5	5.5	5.5	7	7	7	7	7	7	10	10	10	10	10.5	10.5
H3 [mm]	24.5	44	30	49	52	72	52	72	52	72	58	58	90.5	90.5	90	140
H4 [mm]	13.5	13.5	17	17	22	22	22	22	22	22	28	28	28	28	28	28
H5 [mm]	3.5	3.5	7.2	7.2	4	4	4	4	5	5	6	6	6	6	8	8
H6 [mm]	17.5	37	30	49	39	59	39	59	52	72	58	58	90.5	90.5	90	140
H7 [mm]	*7	*7	/	/	*13	*13	*13	*13	/	/	/	/	/	/	/	/
D1	M5	M5	M5	M5	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/4"	G1/8"	G1/4"	G3/8"	G3/8"
D2	M5	M5	M5	M5	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/4"	G1/8"	G1/4"	G3/8"	G3/8"
D3	M10x1		M12X1		M14x1.5		M14x1		M16x1		M20x1.5		M20x1.5		M25x1.5	
CH1 [mm]	8	8	10	10	12	12	12	12	12	12	16	16	16	16	22	22
CH2 [mm]	8	8	10	10	12	12	12	12	12	12	16	16	16	16	22	22
CH3 [mm]	13	13	15	15	17	17	17	17	19	19	24	24	24	24	32	32
C [mm]	10	25	10	25	20	35	20	35	20	35	25	25	50	50	40	80
S2 [mm]	10	25	10	25	20	35	20	35	20	35	25	25	50	50	40	80
d [mm]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
K [N/mm]	0.21	0.08	0.2	0.09	0.27	0.15	0.27	0.15	0.25	0.14	0.26	0.26	0.13	0.13	0.26	0.12
R1 [N]	1.49	1.57	1.59	1.52	3.61	4.28	3.62	4.28	3.65	4.32	4.31	4.31	4.4	4.4	5.5	6.25
R2 [N]	3.62	3.70	3.55	3.7	8.98	9.51	8.97	9.51	8.68	9.13	10.76	10.76	10.87	10.87	15.7	15.97
m [g]	12	16.5	19	25	37	47	37	47	46.5	58	85	82	110	111	200	271

*Non filettato
*Not threaded